

## EELS in STEM: the “Swiss Army Knife” of Spectroscopy

Juan Carlos Idrobo<sup>1,\*</sup>, Andrea Konečná<sup>2</sup>, Jaume Gazquez<sup>3</sup>, Jordan A. Hachtel<sup>1</sup>, Tracy C. Lovejoy<sup>4</sup>, Niklas Dellby<sup>4</sup>, F. Javier García de Abajo<sup>5,6</sup>, Mathieu Kociak<sup>7</sup>, Javier Aizpurua<sup>2,8</sup>, and Ondrej L. Krivanek<sup>4</sup>

<sup>1</sup>. Center for Nanophase Materials Sciences, Oak Ridge National Laboratory, Oak Ridge, TN USA.

<sup>2</sup>. Materials Physics Center, CSIC-UPV/EHU, 20018 Donostia-San Sebastián, Spain.

<sup>3</sup>. Institut de Ciència de Materials de Barcelona, Campus de la UAB, 08193 Bellaterra, Spain

<sup>4</sup> Nion Company, 11511 NE 118th St, Kirkland, WA USA.

<sup>5</sup>. ICFO-Institut de Ciències Fotoniques, The Barcelona Institute of Science and Technology, 08860 Castelldefels (Barcelona), Spain.

<sup>6</sup>. ICREA-Institució Catalana de Recerca i Estudis Avançats, Passeig Lluís Companys 23, 08010 Barcelona, Spain.

<sup>7</sup>. Laboratoire de Physique des Solides, Bâtiment 510, CNRS UMR 8502, Université Paris Sud XI, F 91405 Orsay, France.

<sup>8</sup>. Donostia International Physics Center DIPC, 20018 Donostia-San Sebastián, Spain.

\* Corresponding author: idrobojc@ornl.gov

Electron energy-loss spectroscopy (EELS) in scanning transmission electron microscopy (STEM) is arguably the most versatile spectroscopy technique to study materials at (sub)nanometer length scales. Successive improvements over decades has been possible to obtain chemical maps of composition, dielectric response and bonding information of materials [1] — to mention only a few examples. EELS measurements and mapping have been carried out in TEM/STEMs since the 1980s, and elemental mapping with atomic resolution ( $d \leq 2 \text{ \AA}$ ) became routinely possible with the advent aberration-corrected STEMs [2].


Improvements in the understanding of the scattering process involved in EELS have also resulted in the ability of EELS to measure and quantify ferromagnetic phases in materials, analogously to X-ray circular magnetic dichroism (XMCD) in synchrotrons, but with the phase of the electron playing the role of polarization of light [3].

The recent development of a new generation of monochromators [4] and spectrometers [5] has made EELS even more versatile. Phonon mapping with atomic resolution [6,7], primary temperature measurements at the nanoscale (without requiring any previous knowledge of the sample) [8], and the detection of isotopes in water [9] and amino acids [10] are now some of the new “tools” in this Swiss Army knife of spectroscopy that is EELS.

We will review the technical details of the aforementioned tools and discuss potentially relevant new “blades” that could be added to the EELS toolkit. In particular, is it possible to map orbitals with atomic resolution? Can we spectrally detect a superconducting transition? Can we measure cryogenic temperatures with 10s of mK precision? Can we measure specific heat and thermal conductivity of a material? Can we perform radiocarbon dating at the nanoscale? These questions will be addressed and further elaborated during the presentation [11].

## References:

- [1] R.F. Egerton, *Electron Energy-Loss Spectroscopy in the Electron Microscope*, 3rd edition (Springer, 2011).
- [2] D.A. Muller *et al.*, *Science* **319** (2008) p. 1073.
- [3] P. Schattschneider, *et al.*, *Nature* **441** (2006) p. 486.
- [4] O. L. Krivanek, *et al.*, *Phil. Trans. R. Soc. A* **367** (2009), p. 3683.
- [5] T.C. Lovejoy *et al.*, *Microsc. & Microanal.* **24** (2018) p. 446.
- [6] F. S. Hage *et al.*, *Phys. Rev. Lett.* **122** (2019), p. 016103.
- [7] K. Venkatraman *et al.*, arXiv:1812.08895 (2018).
- [8] J. C. Idrobo, *et al.*, *Phys. Rev. Lett.* **120** (2016), p. 095901.
- [9] J.R. Jokisaari, *et al.*, *Adv. Mater.* **30** (2018), p. 1802702.
- [10] J.A Hachtel, *et al.*, *Science* **363** (2019), p. 525.
- [11] This research was supported by the Center for Nanophase Materials Sciences, which is a Department of Energy Office of Science User Facility (J.C.I., J.A.H.). This research was conducted, in part, using instrumentation within ORNL's Materials Characterization Core provided by UT-Battelle, LLC under Contract No. DE-AC05-00OR22725 with the U.S. Department of Energy. Research by A.K. and J.A. was supported by the Spanish Ministry of Economy, Industry and Competitiveness (national projects MAT2015-65525-R, FIS2016-80174-P, and project MDM-2016-0618 of the Maria de Maetzu Units of Excellence Programme). JGdeA acknowledges support from Spanish MINECO (MAT2017-88492-R and SEV2015- 0522) and the European Research Council (Advanced Grant No. 789104-eNANO).

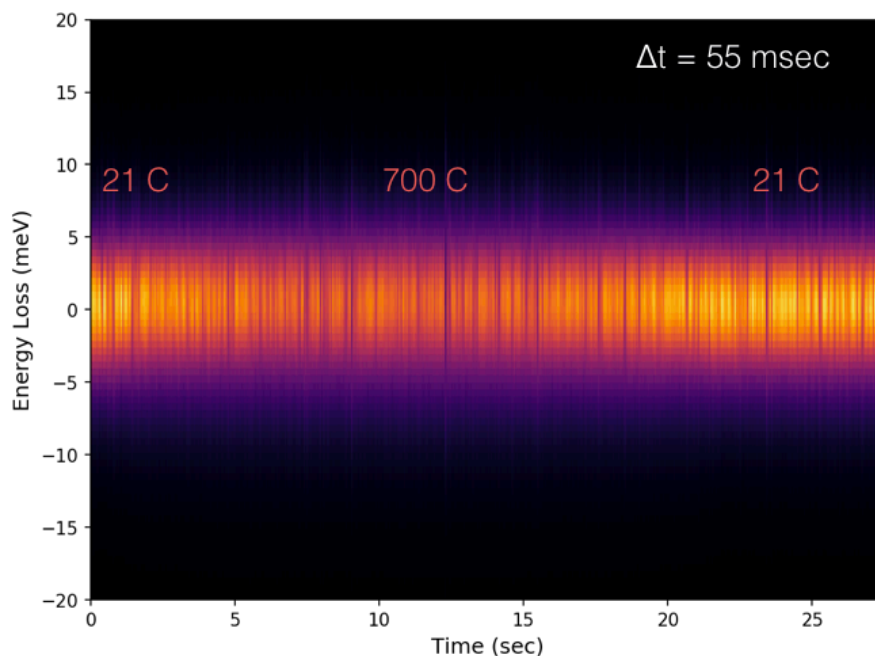

**Figure 1.** Zero-loss peak (ZLP) recorded during a ~27 seconds period at time intervals of 55 msec. The electron probe was in an aloof configuration next to a SiC membrane. The SiC membrane was cycled in temperature from 21 C to up 700 C. Variations in the ZLP, i.e., reduction of its intensity, as well as increment of its full-width-half maximum can be observed when the SiC membrane is heat 700 C. Brighter color means higher intensity. Changes of the ZLP at cryo temperatures (LN) should be also possible to be detected. Measurements as a function of time and temperature should, in principle, allow to extract specific heat and thermal conductivity of a material from spectral features.